



High frequency radar level meter

# 26G Radar Level Meter

Product Manual



# Directory

1、 Product Overview.....	1
2、 Product Introduction.....	2
3、 The Installation Requirements.....	4
4、 The Electrical Connection.....	6
5、 Instrument Commissioning.....	8
6、 Structure Size.....	9
7、 Technical Parameters.....	12
8、 Meter Linearity.....	13
9、 Product Model Selection.....	16
Material level meter selection parameter table.....	22


# High frequency radar level meter

## 1. Product Overview

This series of radar level meter adopted 26G high frequency radar sensor, the maximum measurement range can reach up to 80 meters. Antenna is optimized further processing, the new fast microprocessors have higher speed and efficiency can be done signal analysis, the instrumentation can be used for reactor, solid silo and very complex measurement environment.

### ● Principle

Radar level transmitter antenna microwave pulse is narrow, the downward transmission antenna. Microwave exposure to the medium surface is reflected back again by the antenna system receives, sends the signal to the electronic circuit automatically converted into level signals (because the microwave propagation speed, electromagnetic wave to reach the target and the reflected back to the receiver this time is almost instantaneous).

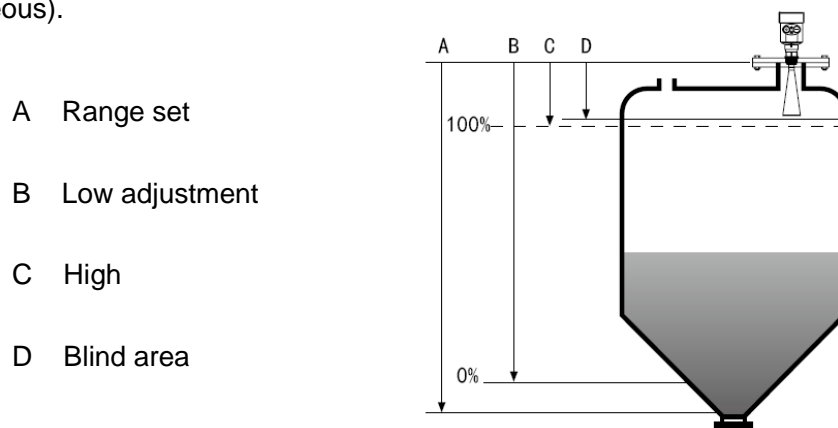

**Datum measurement:** Screw thread bottom or the sealing surface of the flange.

**Note:** Make sure the radar level meter the highest level cannot enter the measuring blind area (Figure D shown below).

### ● The characteristics of 26G radar level meter:

- Small antenna size, easy to install; Non-contact radar, no wear, no pollution.
- Almost no corrosion, bubble effect; almost not affected by water vapor in the atmosphere, the temperature and pressure changes.
- Serious dust environment on the high level meter work has little effect.
- A shorter wavelength, the reflection of solid surface inclination is better.
- Beam angle is small, the energy is concentrated, can enhance the ability of echo and to avoid interference.
- The measuring range is smaller, for a measurement will yield good results.
- High signal-to-noise ratio, the level fluctuation state can obtain better

performance.

- High frequency, measurement of solid and low dielectric constant of the best choice.

## 2. Product Introduction

### LKRD-6901



Application: All kinds of corrosive liquid  
Measuring Range: 10 meters  
Process Connection: Thread, Flange  
Medium Temperature:  $-40^{\circ}\text{C} \sim 130^{\circ}\text{C}$   
Process Pressure:  $-0.1 \sim 0.3 \text{ MPa}$   
Accuracy:  $\pm 5\text{mm}$   
Protection Grade: IP67  
Frequency Range: 26GHz  
Signal Output: 4... 20mA/HART (Two-wire / Four)  
RS485/ Modbus  
Explosion-proof Grade: Exia II C T6 Ga  
Exd ia II C T6 Gb

### LKRD-6902



Application: Liquid  
Measuring Range: 30 meters  
Process Connection: Thread, Flange  
Medium Temperature:  $-40^{\circ}\text{C} \sim 250^{\circ}\text{C}$   
Process Pressure:  $-0.1 \sim 4.0 \text{ MPa}$   
Accuracy:  $\pm 3\text{mm}$   
Protection Grade: IP67  
Frequency Range: 26GHz  
Signal Output: 4... 20mA/HART (Two-wire / Four)  
RS485/ Modbus  
Explosion-proof Grade: Exia II C T6 Ga  
Exd ia II C T6 Gb

### LKRD-6903



Application: Solid material, Strong dust  
easy to crystallize, condensation occasion  
Measuring Range: 70 meters  
Process Connection: Universal Flange  
Medium Temperature:  $-40^{\circ}\text{C} \sim 250^{\circ}\text{C}$   
Process Pressure:  $-0.1 \sim 0.1 \text{ MPa}$   
Protection Grade: IP67  
Accuracy:  $\pm 15\text{mm}$   
Frequency Range: 26GHz  
Signal Output: 4... 20mA/HART (Two-wire / Four)  
RS485/ Modbus

Explosion-proof Grade: Exia II C T6 Ga  
Exd ia II C T6 Gb

### LKRD-6904



Application: Solid material, Strong dust,  
easy to crystallize, condensation occasion

Measuring Range: 80 meters

Process Connection: Universal Flange

Medium Temperature:  $-40^{\circ}\text{C} \sim 250^{\circ}\text{C}$

Process Pressure:  $-0.1 \sim 0.1\text{MPa}$

Accuracy:  $\pm 15\text{mm}$

Protection Grade: IP67

Frequency Range: 26GHz

Signal Output: 4... 20mA/HART (Two-wire / Four)  
RS485/ Modbus

Explosion-proof Grade: Exia II C T6 Ga  
Exd ia II C T6 Gb

### LKRD-6905



Application: Solid particles, Powder

Measuring Range: 30 meters

Process Connection: Thread, Flange

Medium Temperature:  $-40^{\circ}\text{C} \sim 250^{\circ}\text{C}$

Process Pressure:  $-0.1 \sim 4.0\text{MPa}$  (Flat flange)  
 $-0.1 \sim 0.1\text{MPa}$  (Universal Flange)

Accuracy:  $\pm 10\text{mm}$

Protection Grade: IP67

Frequency Range: 26GHz

Signal Output: 4... 20mA/HART (Two-wire / Four)  
RS485/ Modbus

Explosion-proof Grade: Exia II C T6 Ga  
Exd ia II C T6 Gb

### LKRD-6906



Application: Hygienic liquid storage,  
Corrosive container

Measuring Range: 20 meters

Process Connection: Flange

Medium Temperature:  $-40^{\circ}\text{C} \sim 150^{\circ}\text{C}$

Process Pressure:  $-0.1 \sim 0.1\text{MPa}$

Accuracy:  $\pm 3\text{mm}$

Protection Grade: IP67

Frequency Range: 26GHz

Signal Output: 4... 20mA/HART (Two-wire / Four)  
RS485/ Modbus

Explosion-proof Grade: Exia II C T6 Ga  
Exd ia II C T6 Gb

### 3. The Installation Requirements


- **Installation guide:**

Be installed in the diameter of the 1/4 or 1/6.


Note: The minimum distance from the tank wall should be 200mm.

Note: ① datum

②The container center or axis of symmetry

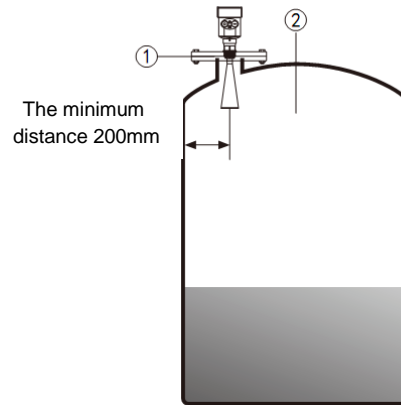


- The top conical tank level, can be installed at the top of the tank is intermediate, can guarantee the measurement to the conical bottom.

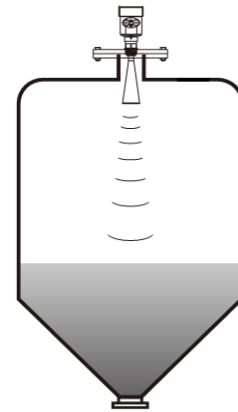

- A feed antenna to the vertical alignment surface. If the surface is rough, stack angle must be used to adjust the angle of cardan flange of the antenna to the alignment surface.

(Due to the solid surface tilt will cause the echo attenuation, even Loss of signal.)

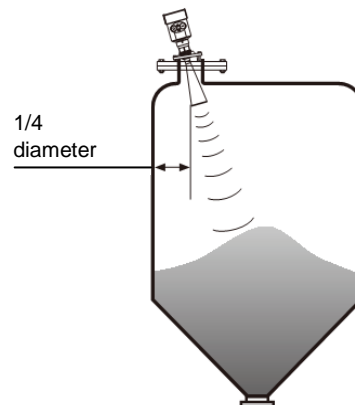


- **Typical installation errors:**

- Conical tank cannot be installed above the feed port.

**Note:** outdoor installation should adopt sunshade.


① Correct

② Error rainproof measures

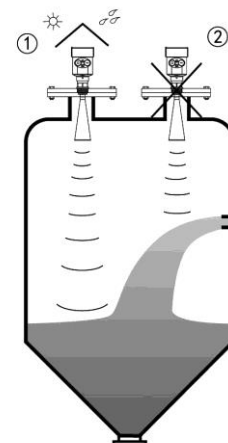


- The instrument cannot be installed in the arched or domed roof intermediate. In addition to produce indirect echo is also affected by the echoes. Multiple echo can be larger than the real value of signal echo, because through the top can concentrate multiple echo. So cannot be installed in a central location.

- ① Correct
- ② Error

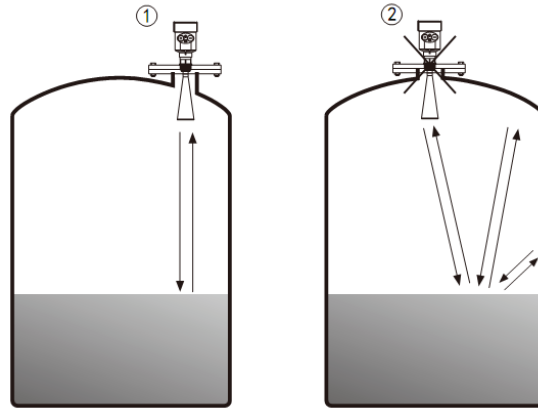


- There are obstacles affecting measurement needed reflection plate.

- ① Correct
- ② Error

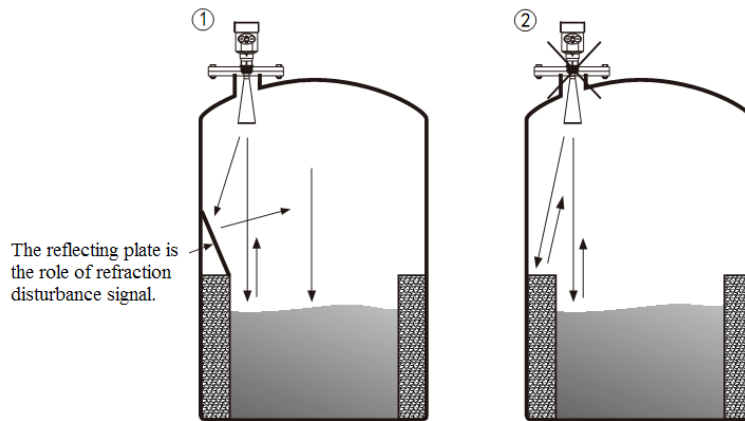

- **Height of nozzle:**

Antenna extends into the tank at least 10mm distance.

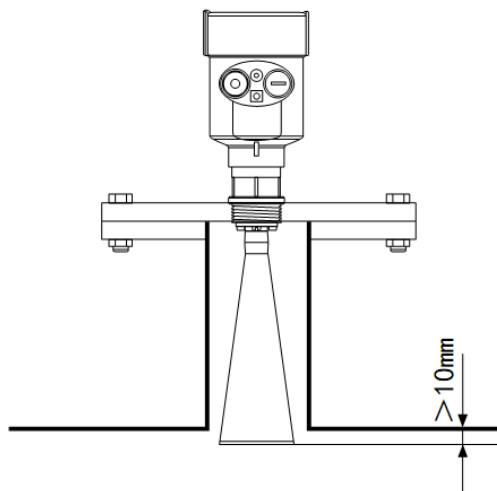

## 4. The Electrical Connection

- **The power supply voltage:**

---

(4~20)mA/HART (Two wire system)	The power supply and the output current signal sharing a two core shield cable. The supply voltage range see technical data. For intrinsically safe type must be a safety barrier between the power supply and the instrument.
---------------------------------	--

---

(4~20)mA/HART(Four wire system)	Separate power supply and the current signal, respectively using a two-core shielded cable. The supply voltage range see technical data.
---------------------------------	--


---

RS485 / Modbus	Power supply and Modbus signal line separate drespectively using a two-core shielded cable, the power supply voltage range see technical data.
----------------	--


---

- **Connection mode:**

- 24V two wire wiring diagram as follows:

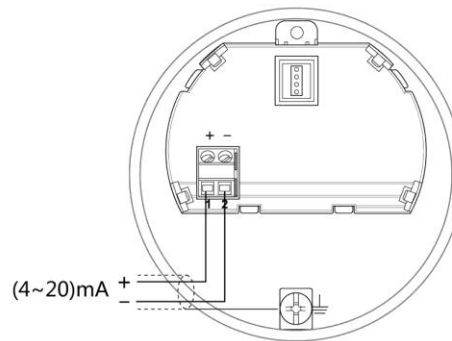


- 220V four wire connection is as below:

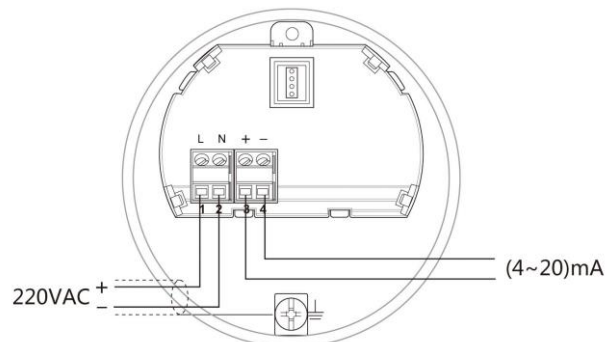



- 24V RS485/Modbus wiring diagram as follows:

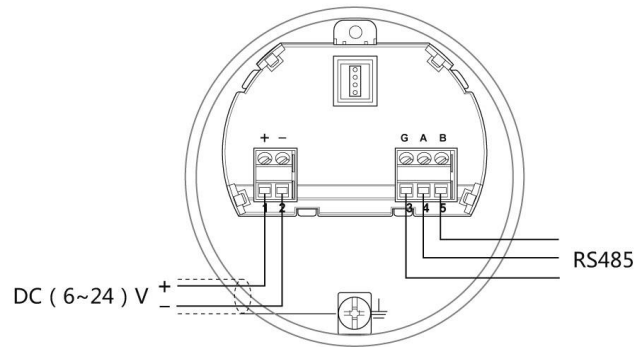


- **Safety instructions:**

- Please observe the local electrical code requirements!
- Please comply with local requirements for personnel health and safety regulations. All electrical components of instrument operation must be completed by the formal training of professionals.
- Please check the instrument nameplate to provide product specifications meet your requirements. Please make sure that the power supply voltage and instrument nameplate on the requirements.

- **Protection grade:**

This instrument meets the protection class IP66/67 requirements, please ensure the waterproof cable sealing head. The following diagram:

:

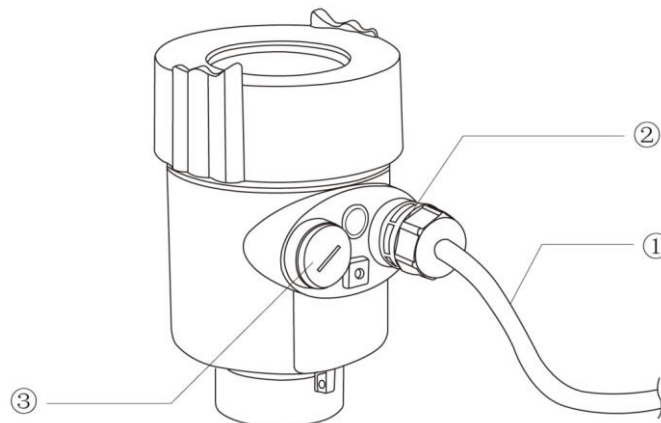

## How to install to meet the requirements of IP67:

Please make sure that the sealing head is not damaged.

Please make sure that the cable is not damaged.

Please make sure that the cable for use with electrical connection specification.

Cable into the electrical interface before its curved downward, ensure that the water will not flow into the shell, see the①

Tighten the cable seal head, see the②

Please electrical interface will not use blind plug tight, see the③

## 5. Instrument Commissioning


- **There are three kinds of debugging method:**

- 1) Display / Keyboard
- 2) Host debugging
- 3) HART handheld programmer

- **Display / Keyboard:**

Please debug the instrumentation by four buttons on the display screen. There are three debug menu languages optional. After debugging is generally used only for display, through the glass window can read measured value very clearly.

Display / Keyboard

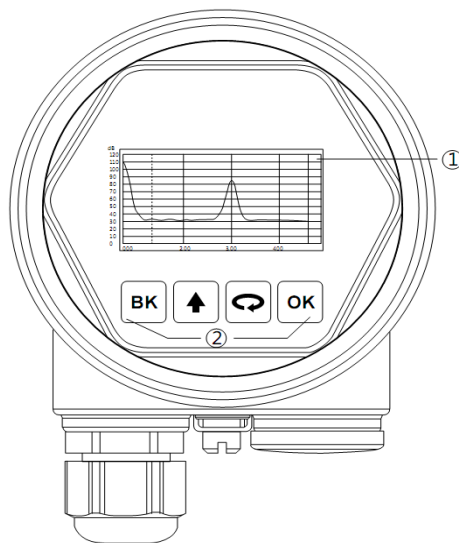


① Liquid crystal display(LCD)

② The key

● **PC debugging:**


Connected to PC by HART

- ① RS232 interface or USB interface
- ② Radar level meter
- ③ HART adapter
- ④ 250  $\Omega$  resistor

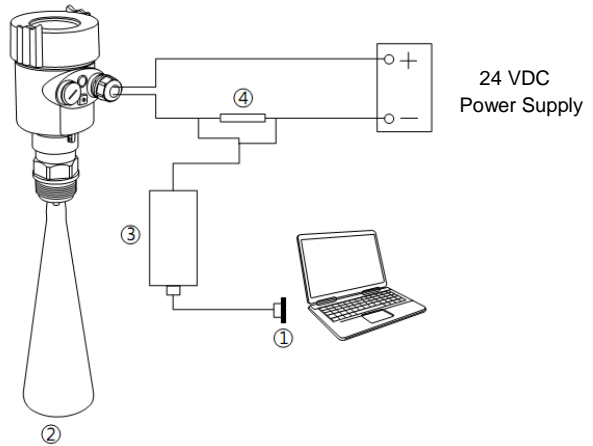


● **HART handheld programmer:**

- ① HART handheld programmer
- ② Radar level meter
- ③ 250  $\Omega$  resistor

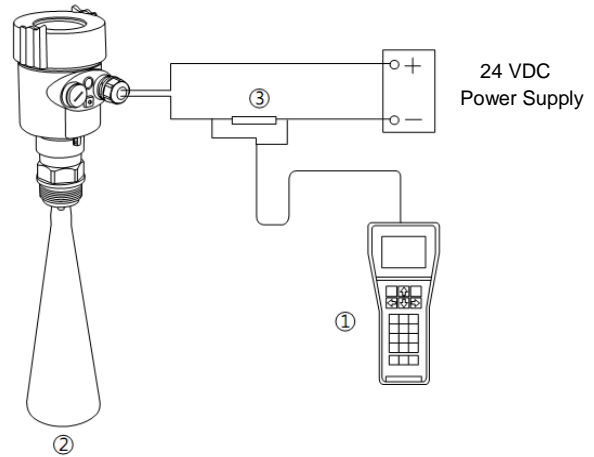


**6. Structure Size** (Unit: mm)

● **The outer shell:**

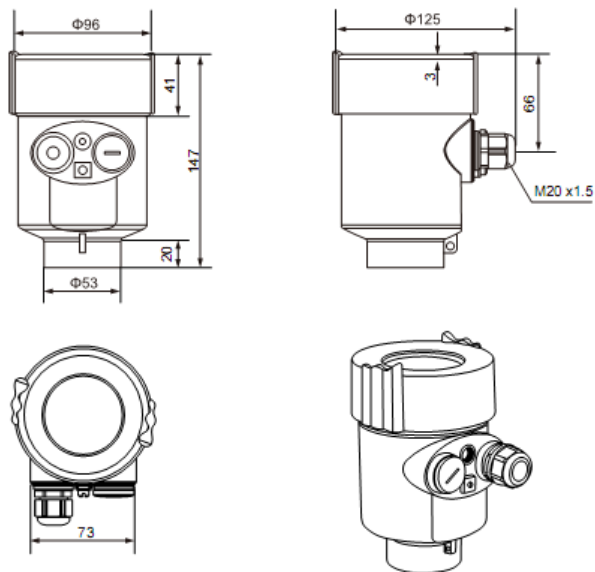


● Appearance size:

**LKRD-6901**

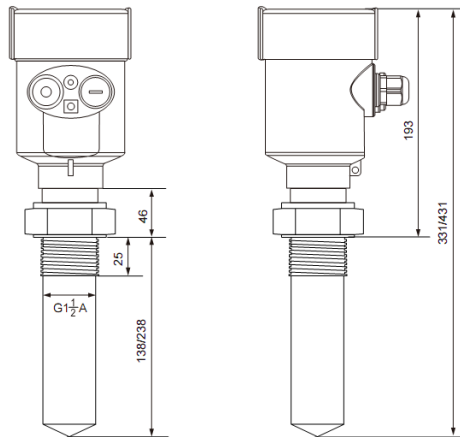


**LKRD -6902**

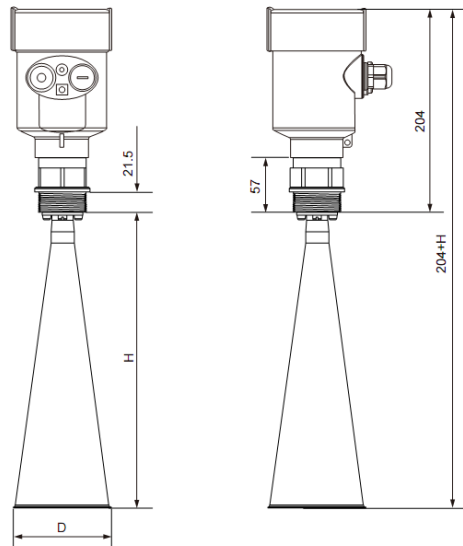


Flange	The Bell Diameter D	Bell height H
DN50	Φ46	140
DN80	Φ76	227
DN100	Φ96	288

**LKRD -6903**

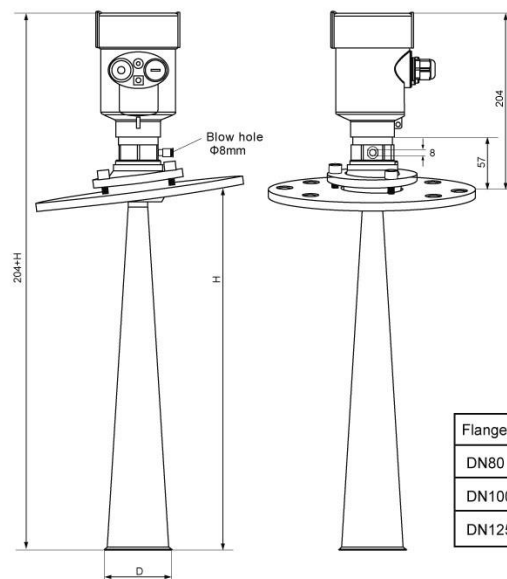


Flange	The Bell Diameter D	Bell height H
DN80	Φ76	227
DN100	Φ96	288
DN125	Φ121	620


### LKRD -6904

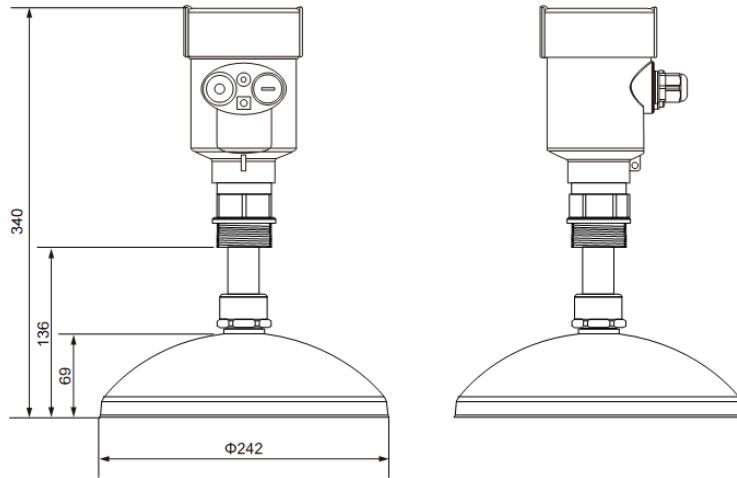


### LKRD -6905

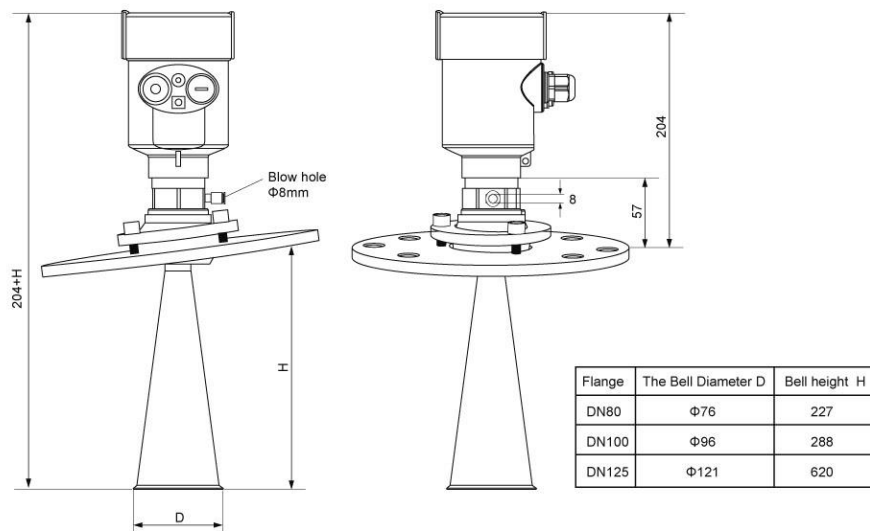

### LKRD -6906

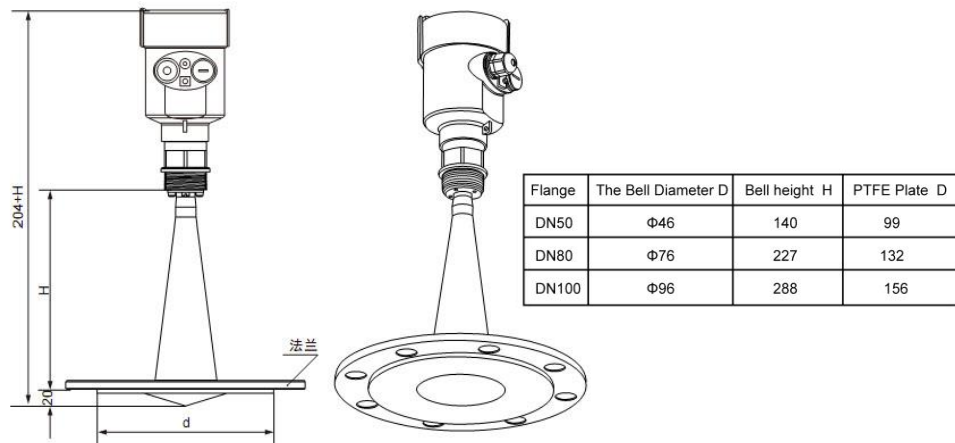

● **Flange type:**

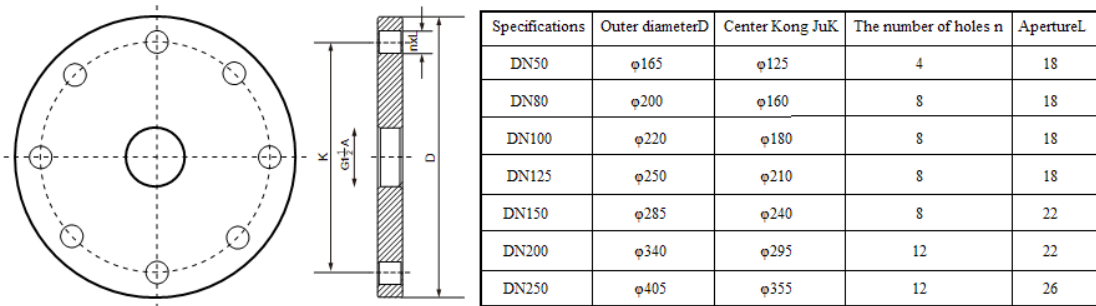

## 7. Technical Parameters

### The outer shell

The seal between the shell and the shell cover	Silicone rubber
Casing window	Polycarbonate
The ground terminal	Stainless steel

### The power supply voltage

Two wire system		
	The standard type	(16 ~ 26) V DC
	Intrinsically safe	(21.6 ~ 26.4) V DC
	Power dissipation	max 22.5mA / 1W
	Allowable ripple	
	- <100Hz	$U_{ss} < IV$
	- (100 ~ 100K) Hz	$U_{ss} < 10mV$

### The cable parameters

Cable entrance / plug	1 M20x1.5 cable entrance 1 blind plug
Terminal	Conductor cross section 2.5mm <sup>2</sup>

### Output parameters


The output signal	(4 ~ 20) mA/RS485
Communication protocol	HART
Resolution	1.6 μ A
Fault signal	Constant current output; 20. 5mA 22mA 3.9mA
The integral time	(0 ~ 50) s, adjustable

<b>Blind area</b>	the ends of the antenna
<b>The maximum distance measurement</b>	80 meters
<b>Microwave frequency</b>	26GHz
<b>Communication interface</b>	HART communication protocol
<b>The measurement interval</b>	about 1 second (depending on the parameter settings)
<b>Adjust the time</b>	about 1 second (depending on the parameter settings)
<b>Display resolution</b>	1 mm
<b>Working storage and transportation temperature</b>	(-40~100) °C
<b>Process temperature</b> (the temperature of the antenna part)	
901	(-40~130) °C
902/903/904/905	(-40~250) °C
906	(-40~150) °C
<b>Pressure</b>	Max.4MPa
<b>Seismic</b>	Mechanical vibration 10m/s <sup>2</sup> , (10 ~ 150) Hz

## 8. Meter Linearity


### LKRD -6901

Emission angle      20°  
Precision              See chart

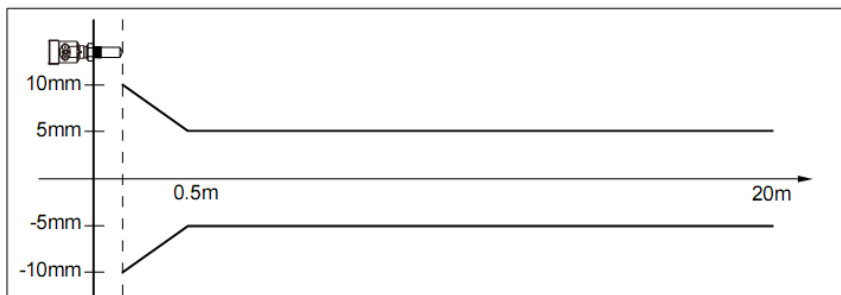


**LKRD -6902**

Emission angle	Depending on the size of the antenna
- $\varnothing$ 46mm	18°
- $\varnothing$ 76mm	12°
- $\varnothing$ 96mm	8°
- $\varnothing$ 121mm	6°
Precision	See chart

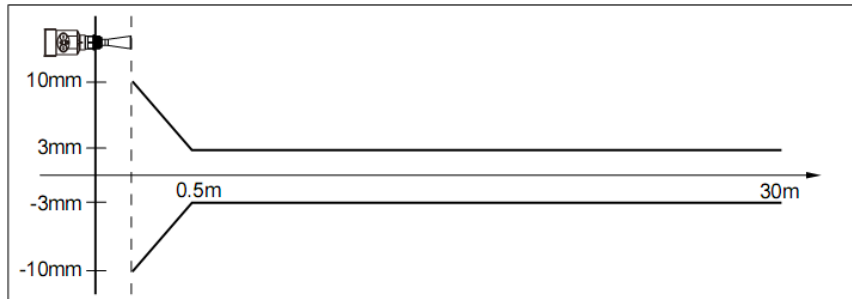

**LKRD -6903**


Emission angle	Depending on the size of the antenna
- $\varnothing$ 46mm	182°
- $\varnothing$ 76mm	12°
- $\varnothing$ 96mm	8°
- $\varnothing$ 121mm	6°
Precision	See chart

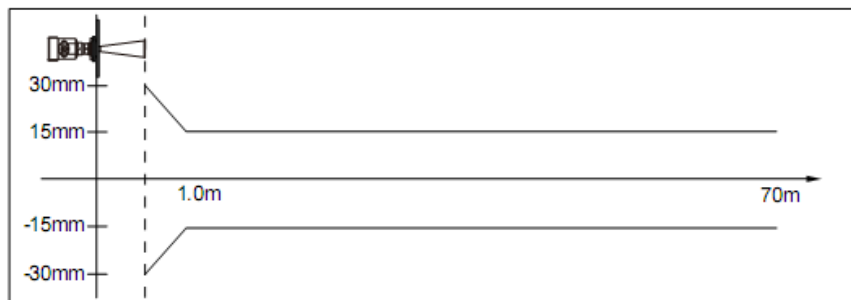

**LKRD -6904**


Emission angle	Depending on the size of the antenna
- $\varnothing$ 196mm	4°
- $\varnothing$ 242mm	4°
Precision	See chart



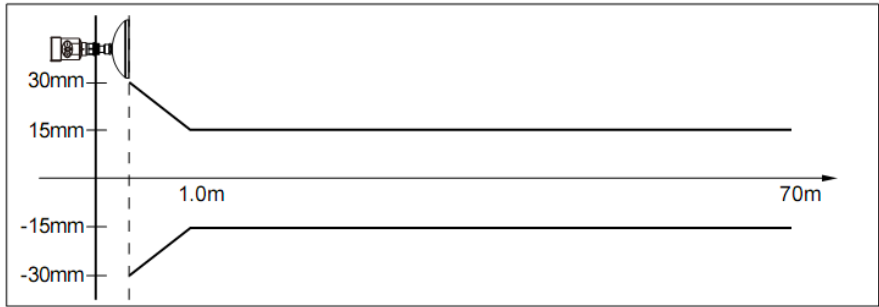


**LKRD -6905**

Emission angle	Depending on the size of the antenna
- $\varnothing$ 76mm	12°
- $\varnothing$ 96mm	8°
- $\varnothing$ 121mm	6°
Precision	See chart

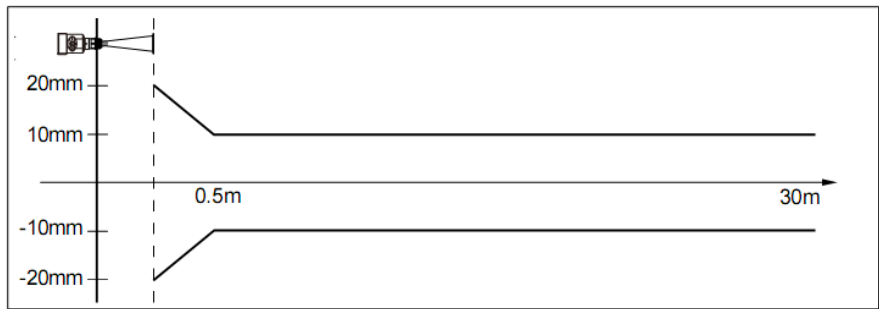

**LKRD -6906**

Emission angle	Depending on the size of the antenna
- $\varnothing$ 46mm	18°
- $\varnothing$ 76mm	12°
- $\varnothing$ 96mm	8°
Precision	See chart

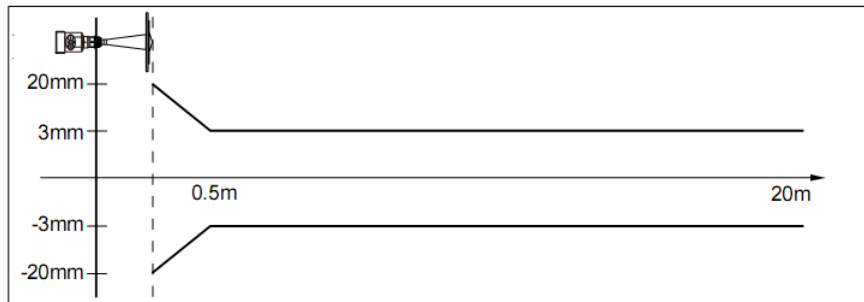

## 9. Product Model Selection

### ● LKRD-6901

#### License

- P Standard (Non-explosion-proof)
- I Intrinsically safe (Exia IIC T6 Ga)
- G Intrinsically safe type, Flameproof (Exd (ia) IIC T6 Gb)

#### Antenna Type / Material / Temperature

F Sealing horn / PTEE / -40... 130 °C

#### Process Connection / Material

- G Thread G1½" A
- N Thread 1½" NPT
- A Flange DN50 /PP
- B Flange DN80 /PP
- C Flange DN100 /PP
- Y Special custom

#### The Outlet Pipe Length of the Container

- A Outlet pipe 100mm
- B Special custom

#### The Electronic Unit

- 2 (4~20) mA / 24V DC / Two wire system
- 3 (4~20) mA / 24V DC / HART two wire system
- 4 (4~20) mA / 220V AC / Four wire system
- 5 RS485 / Modbus

#### Shell / Protection Grade

- L Aluminum / IP67
- G Plastic / IP65

#### Cable Line

- M M 20x1.5
- N ½" NPT

#### Field Display/The Programmer

- A Belt
- X Without

● **LKRD-6902**

**License**

- P Standard (Non-explosion-proof)
- I Intrinsically safe (Exia IIC T6 Ga)
- G Intrinsically safe type, Flameproof (Exd (ia) IIC T6 Gb)

**Process Connection / Material**

- G Thread G1½"A / Stainless Steel 304
- N Thread 1½" NPT / Stainless Steel 304
- A Flange DN50 / Stainless Steel 304
- B Flange DN80 / Stainless Steel 304
- C Flange DN100 / Stainless Steel 304
- Y Special Custom

**Antenna Type / Material**

- A Horn Antenna Φ46mm / Stainless Steel 316L
- B Horn Antenna Φ76mm / Stainless Steel 316L
- C Horn Antenna Φ96mm / Stainless Steel 316L
- Y Special Custom

**Seal Up / Process Temperature**

- V Viton / (-40~150) °C
- K Kalrez / (-40~250) °C

**The Electronic Unit**

- 2 (4~20) mA / 24V DC / Two wire system
- 3 (4~20) mA / 24V DC / HART two wire system
- 4 (4~20) mA / 220V AC / Four wire system
- 5 RS485 / Modbus

**Shell / Protection Grade**

- L Aluminum / IP67
- G Plastic / IP65

**Cable Line**

- M M 20x1.5
- N ½" NPT

**Field Display/The Programmer**

- A Belt
- X Without

● **LKRD-6903**

**License**

- P Standard (Non-explosion-proof)
- I Intrinsically safe (Exia IIC T6 Ga)
- G Intrinsically safe type, Flameproof (Exd (ia) IIC T6 Gb)

**Process Connection / Material**

- G Thread G1½"A / Stainless Steel 304
- N Thread 1½" NPT / Stainless Steel 304
- B Flange DN80 / Stainless Steel 304
- C Flange DN100 / Stainless Steel 304
- D Flange DN125 / Stainless Steel 304
- E Flange DN150 / Stainless Steel 304
- M Flange DN80 / Cardan joint
- K Flange DN100 / Cardan joint
- T Flange DN125 / Cardan joint
- Y Special Custom

**Antenna Type / Material**

- B Horn Antenna Φ76mm / Stainless Steel 316L
- C Horn Antenna Φ96mm / Stainless Steel 316L
- D Horn Antenna Φ121mm / Stainless Steel 316L
- E Horn Antenna Φ76mm / Stainless Steel 316L / Blow hole
- F Horn Antenna Φ96mm / Stainless Steel 316L / Blow hole
- G Horn Antenna Φ121mm / Stainless Steel 316L / Blow hole
- H Horn Antenna Φ76mm / Stainless Steel 316L / Dust-proof Cover
- I Horn Antenna Φ96mm / Stainless Steel 316L / Dust-proof Cover
- J Horn Antenna Φ121mm / Stainless Steel 316L / Dust-proof Cover
- Y Special Custom

**Seal Up / Process Temperature**

- V Viton / (-40~150) °C
- K Kalrez / (-40~250) °C

**The Electronic Unit**

- 2 (4~20) mA / 24V DC / Two wire system
- 3 (4~20) mA / 24V DC / HART two wire system
- 4 (4~20) mA / 220V AC / Four wire system
- 5 RS485 / Modbus

**Shell / Protection Grade**

- L Aluminum / IP67
- G Plastic/ IP65

**Cable Line**

- M M 20x1.5
- N ½" NPT

**Field Display/The Programmer**

- A Belt
- X Without

● **LKRD-6904**

**License**

- P Standard (Non-explosion-proof)
- I Intrinsically safe (Exia IIC T6 Ga)
- G Intrinsically safe type, Flameproof (Exd (ia) IIC T6 Gb)

**Process Connection / Material**

- G Thread G1½"A / Stainless Steel 304
- N Thread 1½" NPT / Stainless Steel 304
- B Flange DN80 / Stainless Steel 304
- C Flange DN100 / Stainless Steel 304
- D Flange DN125 / Stainless Steel 304
- E Flange DN150 / Stainless Steel 304
- F Flange DN200 / Stainless Steel 304
- H Flange DN250 / Stainless Steel 304
- M Flange DN80 / Cardan joint
- K Flange DN100 / Cardan joint
- T Flange DN125 / Cardan joint
- Z Flange DN150 / Cardan joint
- W Flange DN200 / Cardan joint
- V Flange DN250 / Cardan joint
- Y Special Custom

**Antenna Type / Material**

- B Horn Antenna Φ196mm / Stainless Steel 316L
- C Horn Antenna Φ242mm / Stainless Steel 316L

**Seal Up / Process Temperature**

- V Viton / (-40~150) °C
- K Kalrez / (-40~250) °C

**The Electronic Unit**

- 2 (4~20) mA / 24V DC / Two wire system
- 3 (4~20) mA / 24V DC / HART two wire system
- 4 (4~20) mA / 220V AC / Four wire system
- 5 RS485 / Modbus

**Shell / Protection Grade**

- L Aluminum / IP67
- G Plastic/ IP65

**Cable Line**

- M M 20x1.5
- N ½" NPT

**Field Display/The Programmer**

- A Belt
- X Without

● **LKRD-6905**

**License**

- P Standard (Non-explosion-proof)
- I Intrinsically safe (Exia IIC T6 Ga)
- G Intrinsically safe type, Flameproof (Exd (ia) IIC T6 Gb)

**Process Connection / Material**

- G Thread G1½"A / Stainless Steel 304
- N Thread 1½" NPT / Stainless Steel 304
- B Flange DN80 / Stainless Steel 304
- C Flange DN100 / Stainless Steel 304
- D Flange DN125 / Stainless Steel 304
- E Flange DN150 / Stainless Steel 304
- M Flange DN80 / Cardan joint
- K Flange DN100 / Cardan joint
- T Flange DN125 / Cardan joint
- Y Special Custom

**Antenna Type / Material**

- B Horn Antenna Φ76mm / Stainless Steel 316L
- C Horn Antenna Φ96mm / Stainless Steel 316L
- D Horn Antenna Φ121mm / Stainless Steel 316L
- E Horn Antenna Φ76mm / Stainless Steel 316L / Blow hole
- F Horn Antenna Φ96mm / Stainless Steel 316L / Blow hole
- G Horn Antenna Φ121mm / Stainless Steel 316L / Blow hole
- H Horn Antenna Φ76mm / Stainless Steel 316L / Dust-proof Cover
- I Horn Antenna Φ96mm / Stainless Steel 316L / Dust-proof Cover
- J Horn Antenna Φ121mm / Stainless Steel 316L / Dust-proof Cover
- Y Special Custom

**Seal Up / Process Temperature**

- V Viton / (-40~150) °C
- K Kalrez / (-40~250) °C

**The Electronic Unit**

- 2 (4~20) mA / 24V DC / Two wire system
- 3 (4~20) mA / 24V DC / HART two wire system
- 4 (4~20) mA / 220V AC / Four wire system
- 5 RS485 / Modbus

**Shell / Protection Grade**

- L Aluminum / IP67
- G Plastic/ IP65

**Cable Line**

- M M 20x1.5
- N ½" NPT

**Field Display/The Programmer**

- A Belt
- X Without

● **LKRD-6906**

**License**

- P Standard (Non-explosion-proof)
- I Intrinsically safe (Exia IIC T6 Ga)
- G Intrinsically safe type, Flameproof (Exd (ia) IIC T6 Gb)

**Process Connection / Material**

- B Flange DN80 / Stainless Steel 304
- C Flange DN100 / Stainless Steel 304
- E Flange DN150 / Stainless Steel 304
- Y Special Custom

**Antenna Type / Material**

- B Horn Antenna  $\Phi$ 46mm / Stainless Steel 316L
- C Horn Antenna  $\Phi$ 76mm / Stainless Steel 316L
- D Horn Antenna  $\Phi$ 96mm / Stainless Steel 316L

**Seal Up / Process Temperature**

- V Viton / (-40~150) °C

**The Electronic Unit**

- 2 (4~20) mA / 24V DC / Two wire system
- 3 (4~20) mA / 24V DC / HART two wire system
- 4 (4~20) mA / 220V AC / Four wire system
- 5 RS485 / Modbus

**Shell / Protection Grade**

- L Aluminum / IP67
- G Plastic / IP65

**Cable Line**

- M M 20x1.5
- N ½" NPT

**Field Display/The Programmer**

- A Belt
- X Without

## Material level meter selection parameter table:

---

### Customer information

Company: \_\_\_\_\_ Contact: \_\_\_\_\_  
Address: \_\_\_\_\_ Zip code: \_\_\_\_\_  
The Telephone: \_\_\_\_\_ Fax: \_\_\_\_\_ Mobile phone: \_\_\_\_\_  
E-mail: \_\_\_\_\_ Date: \_\_\_\_\_

### License

- The standard type (Non-explosion-proof)  Intrinsically safe (Exia IIB T5)
- Intrinsically safe (Exia IIC T6 Ga)  Intrinsically safe+marine license (Exia IIC T6 Ga)
- Intrinsically safe and Flame proof (Exd ia IIC T6 Gb)

### Tank / Container Information

#### *The Types of Tank:*

- Tank  Reaction Tank  Separation Tank  Marine Tank

#### *The Tank Structure:*

Material of Tank: \_\_\_\_\_ Pressure: \_\_\_\_\_

#### **Tank size:**

Tank Height: \_\_\_\_\_ m Diameter: \_\_\_\_\_

#### *The top of the tank:*

- Vault  Flat  Open  Cone type

#### *The bottom of the tank:*

- Cone bottom  Flat  Slope bottom  Arc bottom

#### *Installation:*

- Top installation  Side installation
- The bypass pipe mount  Guided wave pipe installation

#### *Installation takes over the top of the tank (information):*

Height of take over : \_\_\_\_\_ mm Diameter of take over :: \_\_\_\_\_ mm

### Measurement of Medium

**Media name:**  Lliquid  Solid  Mixed Media

**Medium temperature:** \_\_\_\_\_ °C

**Dielectric Constant:** \_\_\_\_\_

**Linked material:**  Yes  No

**Mixing:**  Yes  No

### Process Connection

**Thread:**  G1½" A  1½" NPT

**Flange**  Flange (DN= )  Flange (ANSI= )

#### **Power supply:**

- 24V DC Two wire system  24V DC Four wire system  220V AC Four wire system

**Output:**  4-20mA  HART

**Display:**  Take the meter display program  Without meter display program