


- Models are available with NPT/BSP fittings
- High precision, durable and compact turbine flow meters.
- Designed to fit inline with the delivery hose or pipework
- Local Display Computer features: 2 Totals (1 Resettable, 1 Cumulative);
- Factory Calibration in gallons and litres; 2 User Calibrations and Flowrate.
- Power by 2 xAAA batteries (Approx life 9000 hours)



Fitting Type	NPT or BSP (Female)	
Housing Material	Aluminum	
Meter Sizes Available	3/4"	1" 1-1/2"
Flow Range	3/4"	2 - 20 GPM (7.6 - 75.7 LPM)
	1"	5 - 50 GPM (18.9 - 190 LPM)
	1-1/2"	10 - 100 GPM (38.0 - 380 LPM)
Accuracy (% of Reading)	3/4"	± 1%
	1"	± 1%
	1-1/2"	± 0.5%
Repeatability	± 0.1%	
Pressure Rating	300 PSI / 21 BAR	
Operating Temperature Range	-40° F to +250° F (-40°C to +121°C)	

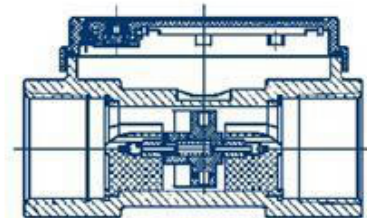

Electronic Turbine Flow Meter

- For low viscosity fluids
- Easy to install, in line or at the end of a delivery pipe
- The ideal instrument for controlling fluid dispensing
- Sturdy casing and a sealed electronic card make it suitable for use in practically all conditions.
- Reinforced polyamide body
- Polypropylene turbine
- Electronic card with LCD display:
- 5 digit partial total from 0.1 to 99 999, 6 digit total from 1 to 999 999
- Resettable total available.
- Can be calibrated
- Powered by two AAA batteries

